



Drawing B-1017

Direction of laying of insulated panels

Applied with hot bitumen

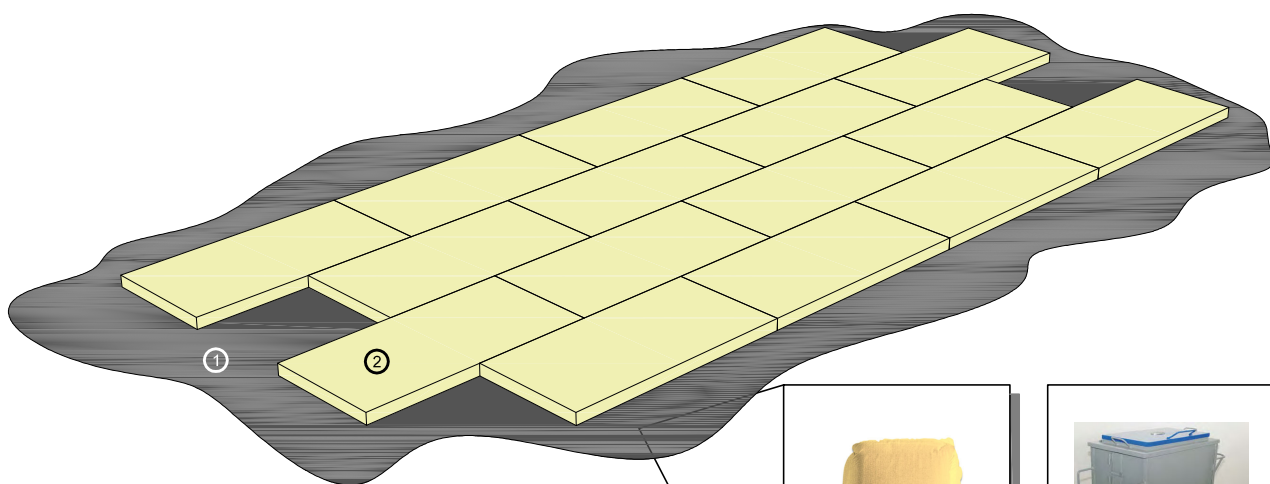

① Coating with hot bitumen, quantity: 1,5 kg/m²

② Insulated panel fire resistant

Type: PUR VB - PUR C, FESCO BOARD S or FESCO BOARD V made by POLYGLASS S.p.A.